



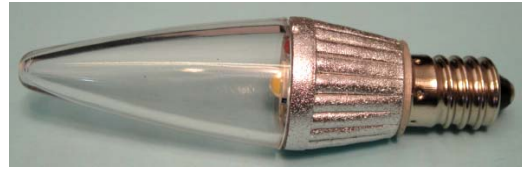

SL-205 AC LED 110V

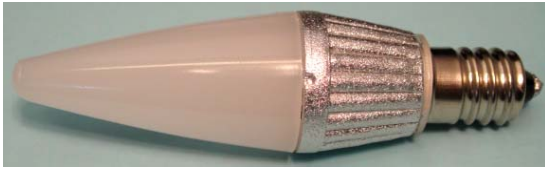

I. FEATURE

- Available in a selection of LED colors (W/WW)
- Replace of traditional halogen bulb
- Standard E14 base and no need of modification
- MR16 is the lightest in the market currently (25g)
- Operating voltage at AC110 V
- Excellent thermal performance
- Beam angle at 120 degree
- Safety Standard:CE
- No UV

II. Typical Applications

- Entertainment/Commercial lighting
- Architectural lighting
- Landscape lighting
- Household lighting
- Decorating Lighting

III. THE PRODUCT

- Operating Voltage: AC 110V 50/60 Hz
- Pin Type: E14
- Bottom base: PC, flammability: V2 level
- Heat sink: Aluminum alloys, 45~55°C after heat balance ($T_j = 25^{\circ}\text{C}$)
- Operating Temp. : -10~40 °C

Power	Led	Lumi	Bean Angle	Color	Part No.
2.0W	2.0W	33-36	120°	Warm White	SL-205(1W-110V/WW)
2.0W	2.0W	45-55	120°	White	SL-205(1W-110V/W)

Photometric

Ambient Operating Temperature, $T_j = 25^{\circ}\text{C}$

Color	Dominat Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
White	6000K	7000K	
Warm White	2800K	3800K	

Version: CINDI SL-205 110V SPEC 990701