



SL-207




I. FEATURE

- Available in a selection of LED light colors
- Used as a replacement of traditional Halogen lamps
- Standard E-27 base and no need of modification
- E-27 is the lightest in the market currently (64.8g)
- Voltage operation at 100V-240V
- Aluminum material which provide good ability of heat conduction
- Beam angle at 78 degree ($1/2 \theta$)
- Safety Standard: CE
- No UV

II. Typical Applications

- Entertainment and commercial lighting
- Architectural lighting
- Landscape lighting
- Household / Security / Garden lighting
- Boutique lighting

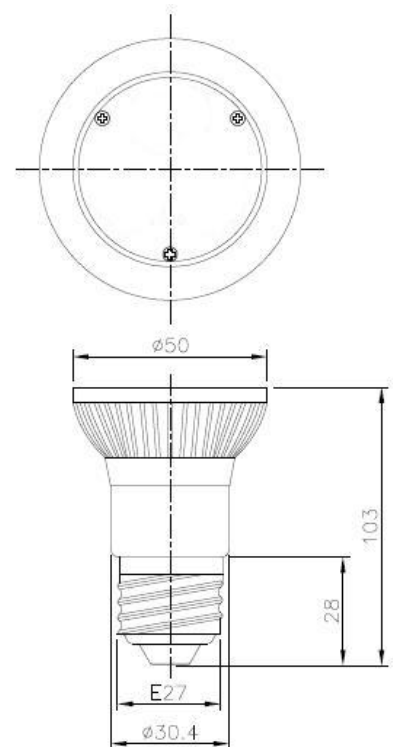

III. THE PRODUCT

- Operating Voltage: 100V-240V 50/60 Hz
- Bottom base: PC, flammability: V2 level
- Heat sink: Aluminum alloy appearance, 55~65°C after heat balance (Tj = 25°C)
- Operating Temp. :-10~40 °C

E-27 Power	Led	Lumi	Beam Angle	Color	Part No.
5.0W	1W*3	135-165	78° (1/2 θ)	Red	SL-207(5W-R)
5.0W	1W*3	150-165	78° (1/2 θ)	Green	SL-207(5W-G)
5.0W	1W*3	30-45	78° (1/2 θ)	Blue	SL-207(5W-B)
5.0W	1W*3	105-120	78° (1/2 θ)	Amber	SL-207(5W-Y)
5.0W	1W*3	240-300	78° (1/2 θ)	Warm White	SL-207(5W-SW)
5.0W	1W*3	240-300	78° (1/2 θ)	White	SL-207(5W-W)

Photometrics

Ambient Operating Temperature, Tj = 25o

Color	Dominant Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25
Amber	585	595	25
White	6000K	7000K	
Warm White	2800K	3800K	