



SL-212 E-14 or E-27 -clear -foggy




I. FEATURES

- Variety of colors (R/G/B/Y/W/WW)
- Compatible with E-14 or E-27 lamp, and take the place of traditional halogen bulb
- Standard E-14 or E27 type; no need to change the pins
- Lightness (45g)
- Low voltage operation at 100V - 240V
- Aluminum material which provide excellent ability of heat conduction
- Beam angle at 120 degrees
- Safety Standard: CE
- No UV

II. Typical Applications

- Entertainment and commercial lighting
- Architectural lighting
- Landscape lighting
- Household / Security / Garden lighting
- Boutique / Decoration lighting

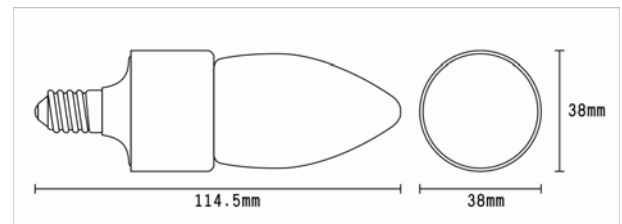

III. Dimensions (mm)

III. SPECIFICATION

- Operating Voltage: 100V - 240V AC, 50/60 Hz
- Pin Type: E-14 or E-27
- Bottom base: PC, flammability: V2 level
- Heat sink: Aluminum alloy appearance, 45~55°C after heat balance (Tj = 25°C)
- Operating Temp. :-10~40 °C

Power	Led	Lumi	Beam Angles	Color	Part No.
2.3W	1.8W	70-85	120°	Red	SL-212 E-14 or E-27 /R
3.5W	2.6W	87-115	120°	Green	SL-212 E-14 or E-27 /G
3.5W	2.3W	25-30	120°	Blue	SL-212 E-14 or E-27 /B
2.3W	1.8W	70-85	120°	Amber	SL-212 E-14 or E-27 /A
3.2W	2.3W	99-117	120°	Warm White	SL-212 E-14 or E-27 /WW
3.2W	2.3W	129-168	120°	White	SL-212 E-14 or E-27 /W

Wavelength

Operating temperature: 25°C

Color	Dominant Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25
Amber	585	595	25
White	6000K	7000K	
Warm White	2800K	3800K	