




SL-50X

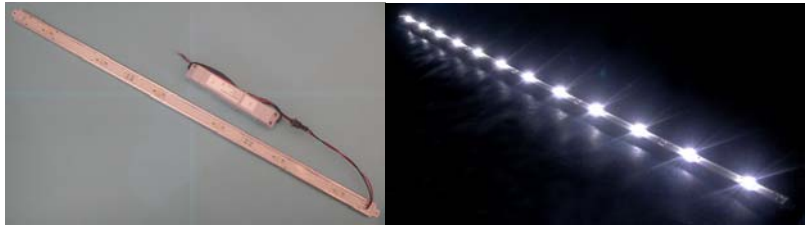


I. FEATURE

- Available in a selection of LED light colors
- Compatible with traditional T5 lighting, and provide direct or indirect illumination
- High power LED mini light Bar
- Operate in constant current which provide good stability
- AC adapter in AC: 90~240V out: 350 mA
- Aluminum material which provide excellent heat conduction and the feature of constant temperature
- Beam angle at 120° degree
- Safety Standard: CE
- No UV

II. Typical Applications

- Entertainment lighting
- Architectural lighting
- Landscape lighting
- Indoor / Security / Garden lighting
- Boutique lighting

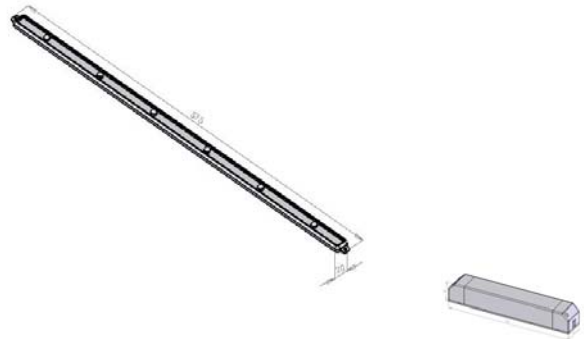

III. THE PRODUCT

Model No.	SL-502	SL-506	SL-512
Color	Warm White, White, Red, Green, Blue, Amber		
LED No.	2Pcs	6Pcs	12Pcs
Power Watts	3.5W	10.0W	18.0W
LED	2.5W	7.6W	15.0W
Luminous Flux (lm for white)	180~200lm	540~600lm	1090~1200lm
Mechanical Dim	200x21 mm	560x21 mm	110x21 mm
Net Weight	44g	133g	268g
Operation	AC: 90~240V	AC: 90~240V	AC: 90~240V
Operating Temp.	-10~40 °C	-10~40 °C	-10~40 °C
Storage Temp.	-20~60 °C	-20~60 °C	-20~60 °C
Warranty	One Year		

- Bottom base: PC, flammability: V2 level
- Heat sink: Aluminum alloys, 45~55°C after heat balance (Tj = 25°C)

Photometrics

Ambient Operating Temperature, Tj = 25°C

Color	Dominant Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25
Amber	585	595	25
White	6000K	8000K	
Warm White	2700K	3500K	