




SL-50X-T

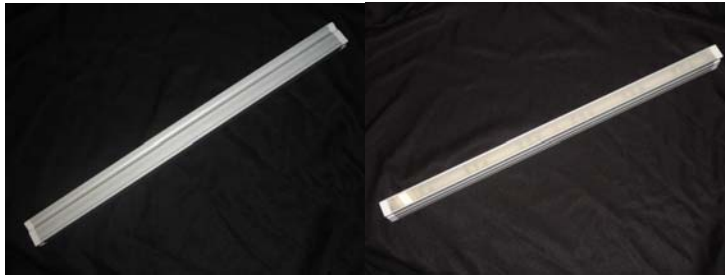


I. FEATURE

- Variety of colors (R/G/B/Y/W/WW)
- Compatible with traditional T5 lighting, and provide direct or indirect illumination
- High power LED mini light Bar
- Operate in constant current which provide good stability of voltage
- AC adapter in AC: 90~240V
- Aluminum material which provide excellent thermal performance
- Beam angle at 90° or 30° degree
- Safety Standard: CE
- No UV

II. Typical Applications

- Entertainment / Commercial lighting
- Architectural lighting
- Landscape lighting
- Bollards / Security / Garden lighting
- Boutique / Decoration lighting

III. Dimensions (mm)

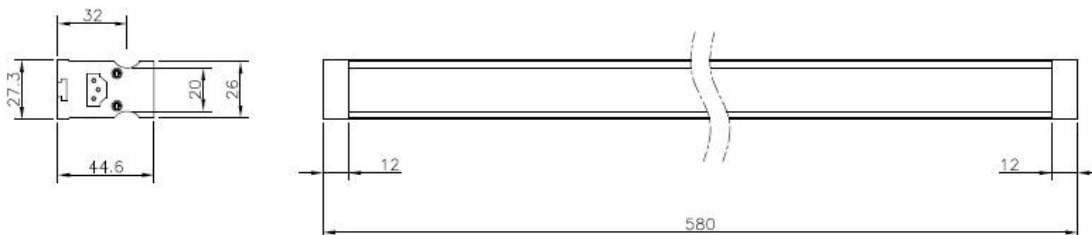

IV. SPECIFICATION

Model No.	SL-506-T-5050	SL-506-T
Color	Warm White, White, Red, Green, Blue, Amber	
LED No.	36Pcs	6Pcs
Power Watts	8.0W	10.0W
LED	6.0W	7.6W
Luminous Flux (lm for white)	540~468lm	540~600lm
Mechanical Dim	600*27*45mm	560x21 mm
Net Weight	450g	133g
Operation	AC: 90~240V	AC: 90~240V
Operating Temp.	-10~40 °C	-10~40 °C
Storage Temp.	-20~60 °C	-20~60 °C
Warranty	One Year	

- Dimensions: length 60 Cm, width 2.7 Cm, height 4.5 Cm
- Bottom base: PC, flammability: V2 level
- Heat sink: Aluminum alloys, 35~45°C after heat balance (Tj = 25°C)

Photometric

Ambient Operating Temperature, Tj = 25°C

Color	Dominant Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25
Amber	585	595	25
White	6000K	8000K	
Warm White	2700K	3500K	