




SL-55X-W-WW

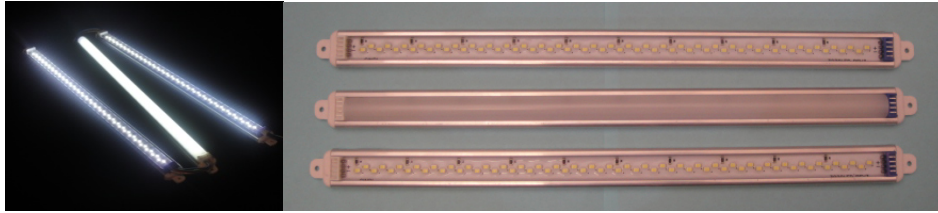

I. FEATURE

- Available in a selection of LED colors(W/WW)
- Compatible with traditional T5 lighting, and provide direct or indirect illumination
- High power LED mini light Bar
- Alternative cover (light-conductive cover or heat-dissipate gel)
- Operate in constant voltage DC: 24V
- Aluminum material which provide excellent thermal performance
- Beam angle at 120°
- Safety Standard: CE
- No UV

II. Typical Applications

- Entertainment lighting
- Architectural lighting
- Landscape lighting
- Bollards / Security / Garden lighting
- Boutique lighting



III. THE PRODUCT

Model No.	SL-551
Color	W or WW
LED No.	60Pcs
Power Watts	
LED	4.5W
Luminous Flux	400lm
Mechanical Dim	325x21 mm
Net Weight	44g
Operation	DC: 24V
Operating Temp.	-10~40 °C
Storage Temp.	-20~60 °C
Warranty	One Year

- Bottom base: PC, flammability: V2 level
- Heat sink: Aluminum alloys, 34~55°C after heat balance (Tj = 25°C)

Photometrics

Ambient Operating Temperature, Tj = 25°C

Color	Dominat Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25