



**SL-705** -clear -foggy -diamond




## I. FEATURE

- Available in a selection of LED light colors
- Compatible with the standard of E-27 lamps, and it can replace the incandescent light bulbs
- Standard E-27 base and no need of modification
- The weight is only 60grams
- Low voltage operation at 100V-240V
- Aluminum material which provide excellent thermal performance
- Beam angle at 120° degree
- Safety Standard: CE
- No UV

## II. Typical Applications

- Entertainment lighting
- Architectural lighting
- Landscape lighting
- Bollards / Security / Garden lighting
- Aluminum

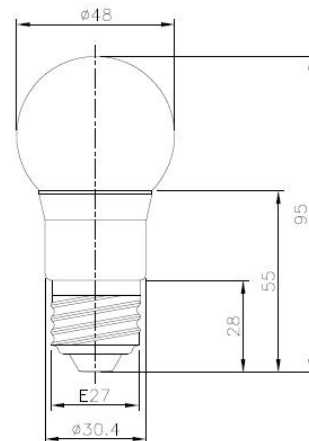

### III. THE PRODUCT

- Operating Voltage: 100V-240V 50/60 Hz
- Bottom base: PC, flammability: V2 level
- Heat sink: Aluminum alloys, 35~45°C after heat balance (Tj = 25°C)
- Operating Temp. :-10~40 °C

E-27 Power	Led	Lumi	Beam Angle	Color	Part No.
2.3W	1.8W	70-85	120°	Red	SL-705(3W- E-27/R)
3.5W	2.6W	87-115	120°	Green	SL-705(3W- E-27/G)
3.5W	2.3W	25-30	120°	Blue	SL-705(3W- E-27/B)
2.3W	1.8W	70-85	120°	Amber	SL-705(3W- E-27/Y)
3.2W	2.3W	129-155	120°	Warm White	SL-705(3W- E-27/WW)
3.2W	2.3W	129-168	120°	White	SL-705(3W- E-27/W)

### Photometric

Ambient Operating Temperature, Tj = 25o

Color	Dominant Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25
Amber	585	595	25
White	6000K	7000K	
Warm White	2800K	3800K	