



SL-707 -clear -foggy -diamond




I. FEATURE

- Available in a selection of LED light colors
- Compatible with the standard of GU-10 lamps, and it can replace the incandescent light bulbs
- Standard GU-10 base and no need of modification
- GU-10 is the lightest in the market currently (68g)
- Low voltage operation at 100V-240V
- Aluminum material which provide excellent thermal performance
- Beam angle at 120° degree
- Safety Standard: CE
- No UV

II. Typical Applications

- Entertainment lighting
- Architectural lighting
- Landscape lighting
- Bollards / Security / Garden lighting
- Aluminum

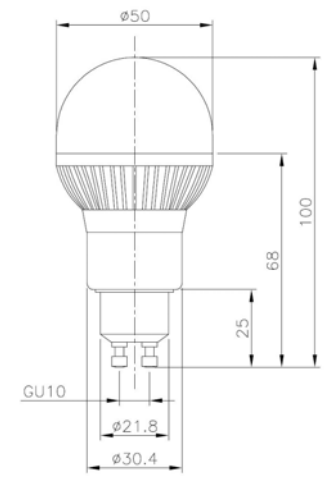

III. THE PRODUCT

- Operating Voltage: 100V-240V 50/60 Hz
- Bottom base: PC, flammability: V2 level
- Heat sink: Aluminum alloys, 55~65°C after heat balance (Tj = 25°C)
- Operating Temp. :-10~40 °C

| GU-10 Power | Led | Lumi | Beam Angle | Color | Part No. |
|-------------|------|---------|------------|------------|---------------|
| 5.0W | 1W*3 | 135-165 | 120° | Red | SL-707(5W-R) |
| 5.0W | 1W*3 | 150-165 | 120° | Green | SL-707(5W-G) |
| 5.0W | 1W*3 | 30-45 | 120° | Blue | SL-707(5W-B) |
| 5.0W | 1W*3 | 105-120 | 120° | Amber | SL-707(5W-Y) |
| 5.0W | 1W*3 | 240-270 | 120° | Warm White | SL-707(5W-WW) |
| 5.0W | 1W*3 | 255-300 | 120° | White | SL-707(5W-W) |

Photometric

Ambient Operating Temperature, Tj = 25o

| Color | Dominat Wavelength | | Half-Width (nm) |
|------------|--------------------|-----------|--------------------|
| | Min. (nm) | Max. (nm) | |
| Red | 620 | 630 | 25 |
| Green | 520 | 530 | 35 |
| Blue | 460 | 470 | 25 |
| Amber | 585 | 595 | 25 |
| White | 6000K | 7000K | |
| Warm White | 2800K | 3800K | |

Version: CINDI SL-707 SPEC 990701