



SL-902




I. Feature

- Accessible in a selection of LED light colors
- Suitable for the use of outdoor power light , easy use and installation
- Standard double-heart circuit to against UV
- Has the function of waterproof which can be applied to outdoor spotlight
- Low voltage operation at 90V-240V AC
- Aluminum material which provide excellent thermal performance
- Beam angle at 30 degrees
- Satisfy the use of outdoor washing-wall spotlight, and as bright as Energy Saving Bulb
- No UV

II. Applications

- Architectural lighting
- Boutique lighting
- Landscape lighting
- Outdoor lighting
- Exhibition lighting

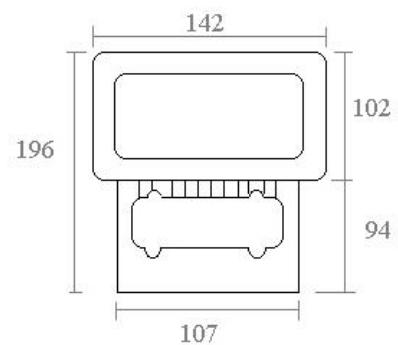

III. Specification

- Operating Voltage: 90~240V AC
- Reserve of 30cm double-heart circuit
- Heat Sink: 100% Aluminum model, strengthen glass
- Install 12 PCS High Power LED ,keep cool and get long longevity
- Operating Temp: -10~40℃

Power Consumption	Led	Lumi	Beam Angle	Color	Part No.
10W	8W	340-660	30°	Red	SL-902-R
10W	8W	600-660	30°	Green	SL-902-G
10W	8W	120-180	30°	Blue	SL-902-B
10W	8W	420-480	30°	Amber	SL-902-Y
10W	8W	540-660	30°	Warm White	SL-902-WW
10W	8W	780-900	30°	White	SL-902-W

Photometrics

Ambient Operating Temperature, Tj = 25o

Color	Dominat Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25
Amber	585	595	25
White	6000K	7000K	
Warm White	2800K	3800K	

Version: CINDI SL-902 Eng SPEC 990818