



SL-961




I. Feature

- Accessible in a selection of LED light colors
- Compatible with power track light , easy use and installation
- Conform to the use and the installation of standard track light
- Apply to the indoor spotlights
- Low voltage operation at 90V-240V AC
- Excellent thermal performance
- Beam angle at 30 degrees
- as bright as Energy Saving Bulb on spotlight
- Safety standard: CE
- No UV

II. Typical Applications

- Architectural lighting
- Boutique lighting
- Landscape lighting
- Indoor and security lighting
- Entertainment and commercial Lighting

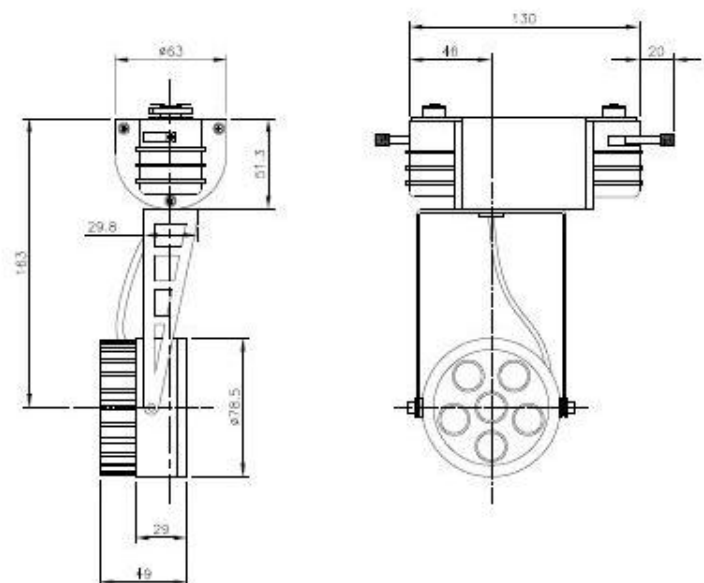

III. SPECIFICATION

- Operating Voltage: 90~240V AC
- Use of Standard Track clasp
- Heat Sink: 100% Aluminum, strengthen glass
- Install 6 PCS High Power LED ,keep cool and get long longevity
- Operating Temp: -10~40℃

M-16 power	Led	Lumi	Bean Angle	Color	Part No.
8.5W	6.0W	270-330	30°	Red	SL-961-R
8.5W	7.2W	270-330	30°	Green	SL-961-G
8.5W	7.2W	66-90	30°	Blue	SL-961-B
8.5W	6.0W	210-270	30°	Amber	SL-961-Y
8.5W	7.2W	480-600	30°	Warm White	SL-961-WW
8.5W	7.2W	480-600	30°	White	SL-961-W

Photometric

Ambient Operating Temperature, Tj = 25o

Color	Dominat Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25
Amber	585	595	25
White	6000K	7000K	
Warm White	2800K	3800K	

Version: CINDI SL-961 SPEC 990701