



SL-962




I . Feature

- Accessible in a selection of LED light colors
- Compatible with power track light , easy use and installation
- Conform to the use and the installation of standard track light
- Apply to the indoor spotlights
- Low voltage operation at 90V-240V AC
- Aluminum material which provide excellent thermal performance
- Beam angle at 30 degrees
- as bright as Energy Saving Bulb on spotlight
- Safety standard: CE
- No UV

II. Typical Applications

- Architectural lighting
- Boutique lighting
- Landscape lighting
- Indoor and security lighting
- Entertainment lighting

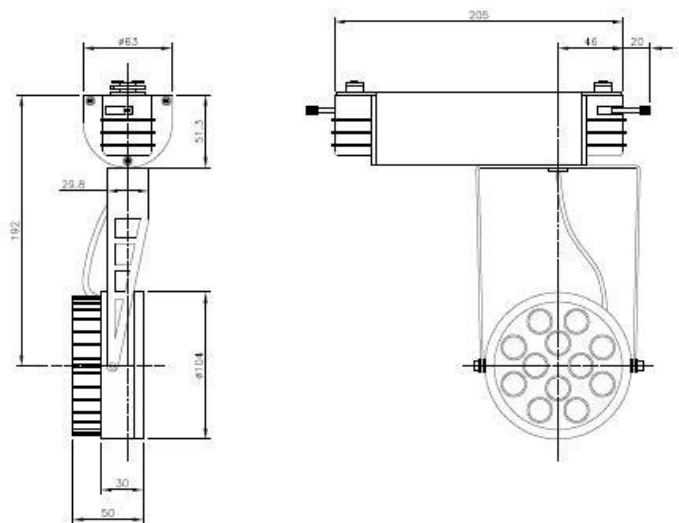

III. SPECIFICATION

- Operating Voltage: 90~240V AC
- Use of Standard Track clasp
- Heat Sink: 100% Aluminum model, and strengthen glass
- Install 12 PCS High Power LED ,keep cool and get long longevity
- Operating Temp: -10~40℃

M-16 Power	Led	Lumi	Beam Angle	Color	Part No.
15W	11W	340-660	30°	Red	SL-962-R
18W	15W	600-660	30°	Green	SL-962-G
18W	15W	120-180	30°	Blue	SL-962-B
15W	11W	420-480	30°	Amber	SL-962-Y
18W	15W	540-660	30°	Warm White	SL-962-WW
18W	15W	780-900	30°	White	SL-962-W

Photometric

Ambient Operating Temperature, Tj = 25o

Color	Dominat Wavelength		Half-Width (nm)
	Min. (nm)	Max. (nm)	
Red	620	630	25
Green	520	530	35
Blue	460	470	25
Amber	585	595	25
White	6000K	7000K	
Warm White	2800K	3800K	

Version: CINDI SL-962 SPEC 990630