



## **SL-781/782**




### **LED T8 Fluorescent Tube**

#### **I. FEATURE**

- Available in two kinds of LED light color: white & warm white
- Ultra-thin aluminum base which provide good ability of heat conduction
- Operating voltage at AC: 90~240V
- Wide range illumination 260°
- Low power consumption
- Saving energy up to 84%
- High PFC 95%
- No UV

## II. Dimension

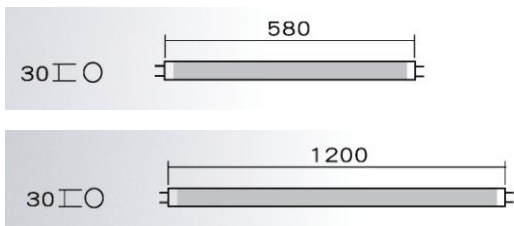

## III. THE PRODUCT

- Operating Voltage: AC90~240V
- Heat sink: Aluminum alloys, 55~65°C after heat balance (Tj = 25°C)
- Operating Temp. :-10~40 °C

	SL-781	SL-782
<b>Length</b>	<b>580mm</b>	<b>1200mm</b>
<b>Power Consumption</b>	<b>10W</b>	<b>20W</b>
<b>LED Power Consumption</b>	<b>9W</b>	<b>18W</b>
<b>LED Spec and Quantity</b>	<b>3020chip x 90pcs</b>	<b>3020chip x 180pcs</b>

### Optical Specification

	SL-781		SL-782	
<b>Color temperature</b>	<b>WW: 2900~3300K</b>	<b>W: 5700~6300K</b>	<b>WW: 2900~3300k</b>	<b>W: 5700~6300K</b>
<b>Lumi</b>	<b>900 lm</b>	<b>1000 lm</b>	<b>1800 lm</b>	<b>2000 lm</b>